


iBridge Video™: Affordable Professional Hi-Res. Remote Video



iBridge Video™: Wi-Fi IP Indoor & Outdoor Cameras - Use alone or integrate with iBridge Connected Home App

WiFi Camera Features:

- Put video accounts online in as little as 10 minutes
- **Upsell your residential & small business alarm accounts on very affordable video for incremental RMR**
- High HD resolution remote video up to 20 frames per second at HD res (1280 x 960)
- **Built in 32GB Onboard HD video storage**, for up to 7 days, viewable from App or online.
- Choice of new cameras, including outdoor dome model, all including one year of cloud-based storage.
- **New outdoor dome camera with choice of WiFi or POE connectivity and mounting options** for wall, ceiling or eave. Ingress protection & vandal resistance, IP67, IK10.
- No dedicated wireless access point required
- Easiest 802.11 camera enrollment: Scan QR code, name camera and enroll in seconds
- **Free Apps** for standalone remote video or as part of iBridge Connected Home (including integral review of optional IVR archived video) on iTunes® and GooglePlay®
- Cameras support full duplex, **2-way audio through App - Talk to premises live** (excludes outdoor dome camera model).

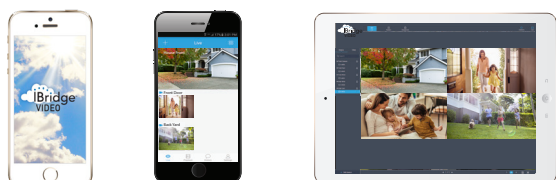

Easy remote video app for use on smart devices or online, lets accounts see what they're missing.

New! Professional Video Doorbell: for New & Existing Systems:

Professional grade 1080HD video, two-way audio, customizable motion sensors & top IP65 ingress rating

- ✓ HD Video with two-way talk & noise-cancellation
- ✓ Custom PIR motion zones
- ✓ Day & Night Live-View & archived video with infrared night vision
- **Sends instant alerts to accounts when visitors press the doorbell or trigger the built-in motion sensors**, so they can hear and speak to anyone at the door from any smartphone, tablet or PC.
 - Motion-activated alerts
 - Video on Demand with Live-View
- Simple 3-button operation - Buttons appear on smartphone screen over video - Press "Accept" to talk (2-way chat), or "Hang up" to disconnect, or "Mute" to just watch
- Durable & weather-resistant, IP-65 Rated (from -4 to 122°F)
- Slim 4.7" x 1.9" x 1.1" iBridge Video Doorbell fits virtually anywhere
- Smart PIR motion detection w/ 3 configurable zones, broad 140° FOV
- **Doorbell is easily enrolled and appears like any other WiFi iBridge Video Camera in the full integrated iBridge Connected Home or Standalone iBridge Video ecosystem, uses free Apps on iTunes®/Google Play®**
- 12-mos. cloud-storage plan included (time-/date-stamped archive)
- Uses existing doorbell power & wiring, with quick 2-wire AC installation
- Over the Air (OTA) automatic firmware updates
- Free Consumer Mailers/Statement Stuffers



iBridge Video™ Wi-Fi IP Indoor & Outdoor Remote Video



	WiFi Fixed Camera	WiFi P/T Camera	WiFi Mini Dome Camera	WiFi Video Doorbell
Model	ISV2-CAM	ISV2-PT	ISV2-DOME	IBV-DBELL
WiFi	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Hi-Def. Image Sensor	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/2.7" 2MP CMOS
App for Standalone Remote Video	<i>iBridge® Video App</i> (iTunes®/GooglePlay®)	<i>iBridge® Video App</i> (iTunes®/GooglePlay®)	<i>iBridge® Video App</i> (iTunes®/GooglePlay®)	<i>iBridge Video App</i> (Standalone)
App for Integrated Video as a part of Connected Home	<i>iBridge® App</i> (iTunes®/GooglePlay®)	<i>iBridge® App</i> (iTunes®/GooglePlay®)	<i>iBridge® App</i> (iTunes®/GooglePlay®)	<i>iBridge® App</i> (integrated) (iTunes®/GooglePlay®) Soon! Live-View on iBridge Touch Touchscreen
iBridge Messenger, Video Notifications, MMS	MMS live pre/post video clips sent as Push Notifications to account	MMS live pre/post video clips sent as Push Notifications to account	MMS live pre/post video clips sent as Push Notifications to account	Push Notifications sent to account; live view & 3-button on-screen operation; video stored to cloud
Special Features	PIR w/ 19.7' Range		PoE-Ready	IP65 Rated; PIR, aimable
Lens	2.8mm/F2.2	3.6mm/F2.1	2.8mm/F2.0	1.9mm
FOV-H (Field of View)	92°	72°	92°	140°
Day/Night	Auto ICR	Auto ICR	DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC	Auto ICR & Infrared Night Vision
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Night Vision, Max IR Distance	32.8' (10m)	32.8' (10m)	98.4' (30m)	16.4' (5m)
Video Compression	H.264	H.264	H.264	H.264
Max. Resolution	1.3MP (1280x960)	1.3MP (1280x960)	1.3MP (1280x960)	2MP (1920x1080)
Frame Rate, Max.	25/30fps@1.3MP	30fps@1.3MP	30fps@1.3MP	20fps@2.0MP
Multi-streaming	2 Streams	2 Streams	2 Streams	2 Streams
Pan/Tilt/Rotation	Pan 0° -360°; Tilt 0°, 90°; Rotation 0-360° (fixed)	Pan 0°-355°; Tilt 0°- 90°	Pan 0° -355°; Tilt 0°- 90° (fixed)	n/a
Pan/Tilt/Range	n/a	Pan 0° -355°; Tilt 0°- 90°; 25 preset	n/a	n/a
Audio In/Out, 2-Way thru App	True 2-Way, Built in Mic/Speaker	True 2-Way, Built in Mic/Speaker	n/a	2-Way Built in Omnidirectional Mic/Speaker w/ noise-cancellation
7 Day Memory, Onboard	32GB	32GB	32GB	use up to 64GB (optional)
Cloud Storage	12mos., incldd	12mos., incldd	12mos., incldd	12mos., incldd
Color	White/Gray	White/Smoke	White/Clear	Dark Metallic Gray
Mounting (std hardware incld)	Shelf/Wall	Shelf/Wall	Wall/Ceiling/Eave	Surface
Optional Mounting Accessories			Bracket ISV2-DOME BKT; Round Waterproof Junction Box ISV2-DOMEBOX	
Other Available Accessories			4-Port PoE Switch, ISV2-POE-4P	
Compliances	CE, UL, FCC	CE, UL, FCC	CE, UL, FCC; IP67, IK10	CE, UL, FCC
Operating Temperature	14° ~ 113°F, Less than 95%RH	14° ~ 113°F, Less than 95%RH	(-10)°C~ 122°F, Less than 95%RH	-4° to 122°F, Less than 95%RH
Dimensions, max.	5"H x 3"W x 3.25"	3.7" X 3.7" x 3.7"	4.33" x 3.19"	4.7" x 1.9" x 1.1"
Power Supply, included	DC 12V	DC 5V2A	DC 12V	16-24V AC (optional 12/24 VDC from alarm system or standard power supply, not incld)
Weight	5.5 oz	7.76 oz	1.2 lbs	0.7 lbs

Ordering Information for iBridge Video Wireless Cameras & Accessories

ISV2CAM WiFi Hi-Def. Fixed Camera with built-in PIR, true 2-way audio built in mic/speaker and 32GB onboard video storage (up to 7 days HD video 720p). Professional grade, fast-connect, up to 20/30 fps 2.4GHz WiFi 802.11 b/g/n, 1.3MP (1280x960) CMOS High Def. Sensor. Provides subscribers MMS Video Push Notifications on smart mobile devices with 10 second alarm/event alerts. White/Gray styling, Shelf or wall mount. 5x 3 x 3.25" Includes power supply and mounting hardware. Use as standalone remote video with iBridge Video App or as part of iBridge Connected Home with iBridge App. Includes 12mos. cloud-based storage. (Supports all current wireless routers - no special WAP required.)

ISV2-PT WiFi Hi-Def. Pan/Tilt Camera, true 2-way audio built in mic/speaker and 32GB onboard video storage (up to 7 days HD video 720p). Professional grade, fast-connect, up to 30 fps 2.4GHz WiFi 802.11 b/g/n, 1.3MP (1280x960) CMOS High Def. Sensor; Pan 0-355 degrees and Tilt 0-90 degrees. Provides subscribers MMS Video Push Notifications on smart mobile devices with 10 second alarm/event alerts. White/Smoke styling, Shelf or wall mount. 3.7 x 3.7 x 3.7". Includes power supply and mounting hardware. Use as standalone remote video with iBridge Video App or as part of iBridge Connected Home with iBridge App. Includes 12mos. cloud-based storage. (Supports all current wireless routers - no special WAP required.)

ISV2-DOME WiFi Hi-Def. Indoor/Outdoor Dome Camera with POE option and 32GB onboard video storage (up to 7 days HD video 720p). Professional grade, Ingress & Vandal-Protected Weatherproof camera (IP67, IK10) for wall, ceiling or eave mounting. Professional grade, fast-connect, up to 30 fps 2.4GHz WiFi 802.11 b/g/n, 1.3MP (1280x960) CMOS High Def. Sensor. Provides subscribers MMS Video Push Notifications on smart mobile devices with 10 second alarm/event alerts. White/Clear styling 4.33 x 3.19". Includes power supply and mounting hardware. Also see optional Mounting Bracket and Round Waterproof Junction Box and optional 4- or 8-Port PoE Switch. Use as standalone remote video with iBridge Video App or as part of iBridge Connected Home with iBridge App. Includes 12mos. cloud-based storage. (Supports all current wireless routers - no special WAP required.)

ISV2-DM MTB Optional Round Junction Box for Dome Camera


ISV2-DM BKT Optional Wall Mounting Bracket for Dome Camera

ISV2-POE-4P 4 Port PoE Switch, optional accessory for dome camera, above. Two-layer industrial POE switch, MAC auto study and aging, MAC address list capacity is 8K. Support IEEE802.3af, IEEE802.3af standard.

ISV2-POE-8P 8 Port PoE Switch, optional accessory for ISV2-DOME camera, as above, but includes 8 ports.

IBV-DBELL WiFi Video Doorbell Professional grade 1080HD video, 2-way audio w/ noise cancellation, custom PIR zones, Day & Night Live View & archived video with infrared night vision. Subscribers enjoy easy 3-button operation, push notifications & archived video. Slimline design, top IP65 weather-rated, dark metallic gray, built in multidirectional mic/speaker, simply uses existing door bell power & 2-wire wiring. Full mounting hardware and 12-mos cloud video storage included.

IBR-TOUCH (option) Integrated Touchscreen, Video-View & Security System Control for Napco, Honeywell/ ADT® & DSC® Systems



A731 Free Enduser iBridge Video Doorbell Residential Mailers/Stuffers (right)



NAPCO, Amityville, NY | 1.800.645.9445 • www.napcosecurity.com

iBridge, iBridge Messenger and iBridge Video are trademarks of Napco. iTunes, Google Play and others are trademarks of their respective companies. ©NAPCO Security Technologies Inc. A696A 2019.6